
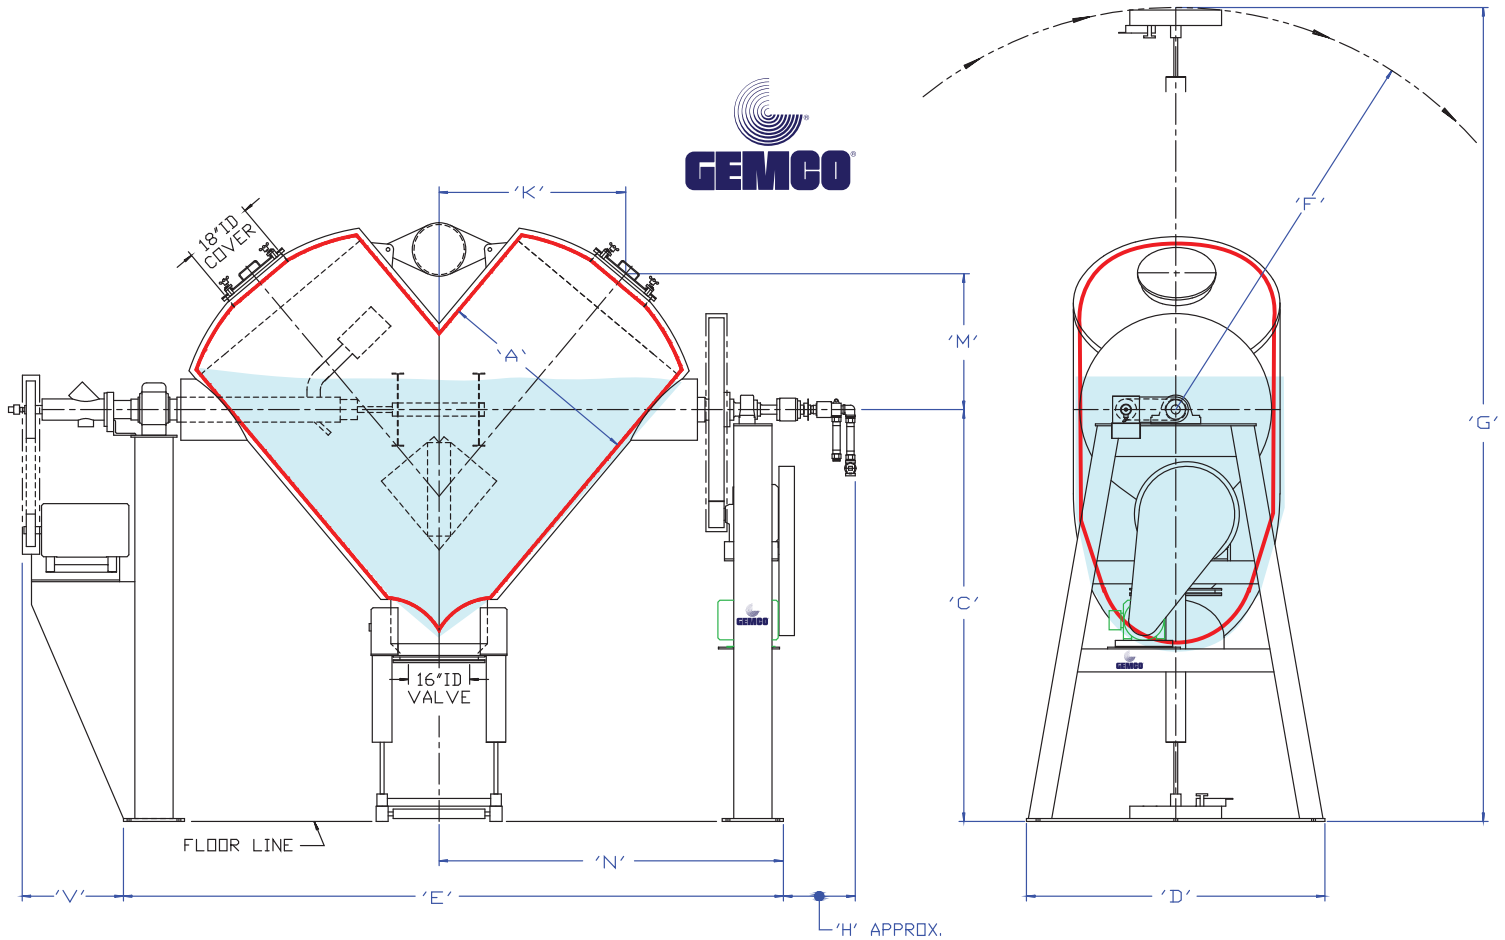


Production D/3 V-Shape Gemcomatic[®] Vacuum Dryer



Color Key:

- Fill Level = 60%
- Main Motor Drive
- Heating Area

			A	C	D	E	F	G	H	K	M	
WORKING VOLUME	DENSITY	DRIVE	VESSEL DIAMETER	CENTER-LINE TO FLOOR	SUPPORT FRAME WIDTH	OVER ALL LENGTH	SWING RADIUS	OVER ALL HEIGHT	MOTOR TO ROTARY UNION	CENTER-LINE TO ACCESS OPENING	CENTER-LINE TO ACCESS OPENING	APPROX. EMPTY WEIGHT
CU. FT.	LBS.	H.P.										LBS.
20	177	5.0	35.0	79.0	66.0	111.8	76.9	155.9	17.3	27.5	20.4	5500
30	250	10.0	41.0	86.3	78.0	130.0	84.0	170.3	25.4	32.6	24.0	6500
40	175	10.0	45.0	91.0	78.0	141.5	88.8	179.8	22.5	36.4	26.6	7500
50	150	10.0	47.0	93.5	78.0	145.5	91.1	184.6	26.9	38.3	28.0	8100
60	150	10.0	50.0	97.0	78.0	155.5	94.8	191.8	26.9	41.0	30.1	9000
75	140	15.0	53.0	100.6	84.0	161.3	98.3	198.9	30.9	43.5	31.9	10000
100	115	15.0	59.0	107.9	84.0	173.3	105.4	213.3	31.4	48.9	35.8	11000
125	150	20.0	62.0	111.5	90.0	188.5	109.0	220.5	34.4	51.5	37.6	13500
150	100	20.0	65.0	115.0	90.0	192.5	112.6	227.6	31.4	57.8	39.6	17000
175	110	25.0	68.0	118.6	96.0	205.0	116.1	234.8	31.4	61.4	41.5	18000
200	100	25.0	71.0	122.3	96.0	207.5	119.8	242.0	31.4	63.8	43.5	19000

- (1) Dimensions above are in inches. (2) Operating capacity is 60% of total volume.
- (3) All dimensions and capacities are subject to change. The information above is for reference only.
- (4) Drives & transmissions are application based. (5) Actual models vary and may not have options shown.

Feel Free to Contact Our Drying Specialists 9:AM – 5:00 EST.

E-mail: sales@okgemco.com 800-OK-GEMCO • 800-654-3626 • www.okgemco.com